

**FIRE EXTINGUISHER
SPECIALIST**

T.T. INTERNATIONAL

CO., LTD.

Incorporated in Hongkong, based in China Mainland, T.T. International has been a leading international corporation focusing on manufacturing and worldwide marketing of fire extinguishers and other related products for more than 20 years. Thanks to our outstanding quality 90% of our products are selling to outside of China including Europe, South American, Middle East and Australia with CE, EN3 approval. Proudly speaking, our company is the EN3 BSI KITE MARK holder for the wide range of fire extinguishers among few holders in China, which further approves the outstanding quality of our fire extinguishers.



Being the owner of the factory, our company is mainly responsible for overseas sales and technical cooperation with partners for the factory. Our outstanding UK partner-Peterlee Fire Company is our Exclusive-Distributor for EN3 approved "ex-celsius" range of extinguishers for the UK market. In year 2008 our factory sold almost 2.3 million units of fire extinguishers becoming the biggest fire extinguisher producer in China.



"Tcool Fire" is our trademark for branding our fire extinguisher; "Fire Extinguisher Specialist" is our company consistent target; "Your safety, our mission" is our company insistent philosophy, which all lead our company to be fully dedicated in

serving our customers with outstanding products, excellent services and distinctive corporate culture. "Tcool Fire" is aiming to be the leading fire extinguisher brand name in the world with our endless effort by bearing it in mind that quality is the life and service is the blood for Tcool Fire.


Tcool Fire is ready to protect you!!!!

Dry Powder Extinguisher



Type	S/P	S/P	S/P	S/P	S/P
Capacity(kg)	1	2	6	9	12
Fire Rating	8A 34B C	13A 55B	27A 183B C	34A 233B C	43A 233B C
Cylinder Hight(mm)	270	310	450	510	600
Cylinder Out-Diameter(mm)	85	110	160	180	180
Cylinder Weight(kg)	0.7	1.1	2.9	4.3	5
Filled Weight(kg)	1	2	6	9	12
Extinguisher Weight(kg)	2.2	3.7	9.7	14	18
Range of Throw(m)	> 2	> 2	> 4	> 4	> 4
Duration of Discharge(secs)	9	10	15	15	18
Working Pressure(bar, at 20 °C)	15	15	15	15	15
Max Working Pressure(bar)	18	18	18	18	18

Test Pressure(bar)	27	27	27	27	27
Temperature Range(°C)	-30°C-60°C	-30°C-60°C	-30°C-60°C	-30°C-60°C	-30°C-60°C
Min Wall-Thickness(mm)	1	1.07	1.24	1.3	1.3
Volume(L)	1.25	2.5	7.5	11.2	13.6
Material	St12/DC01	St12/DC01	St12/DC01	St12/DC01	St12/DC01
Packing Size(cm)	10x10x36	12x13x40	17x18x56	19x20x62	19x20x71
BS EN3 Approved	Yes	Yes	Yes	Yes	Yes

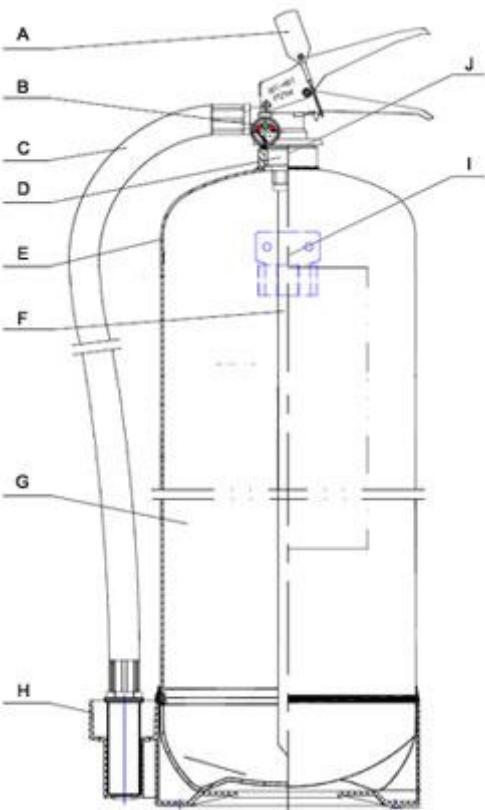

Ref	Description
A	Pull Tite Seal
B	Gauge
C	Hose Assembly
D	Valve Assembly
E	Cylinder
F	Discharge Tube
G	ABC Dry Powder
H	Skirt
I	Wall bracket
J	Neck O Ring Seal


CO2 Extinguisher

4



Type	Alloy-Steel	Alloy-Steel	Aluminium Alloy	Aluminium Alloy
Capacity(kg)	2	5	2	5
Fire Rating	34B	89B	34B	89B
Cylinder Hight(mm)	475	655	475	580
Cylinder Out-Diameter(mm)	105	138	111	159
Cylinder Weight(kg)	4.2	8.5	3.2	8
Filled Weight(kg)	2	5	2	5
Extinguisher Weight(kg)	7	14.5	6	14
Range of Throw(m)	> 4	> 4	> 4	> 4
Duration of Discharge(secs)	13	24	8	14
Working Pressure(bar, 20 °C)	56	56	56	56
Max Working Pressure(bar)	174	174	174	174
Test Pressure(bar)	250	250	250	250

Temperature Range(°C)	-30°C-60°C	-30°C-60°C	-30°C-60°C	-30°C-60°C
Min Wall-Thickness(mm)	2.3	3	6.32	9.05
Volume(L)	3	7.5	3	7.5
Material	34CrMo4	34CrMo4	AA6061	AA6061
Packing Size(cm)	16x13x60	21x15x78	16x13x59	21x17x70
BS EN3 Approved	Yes	Yes	Yes	Yes

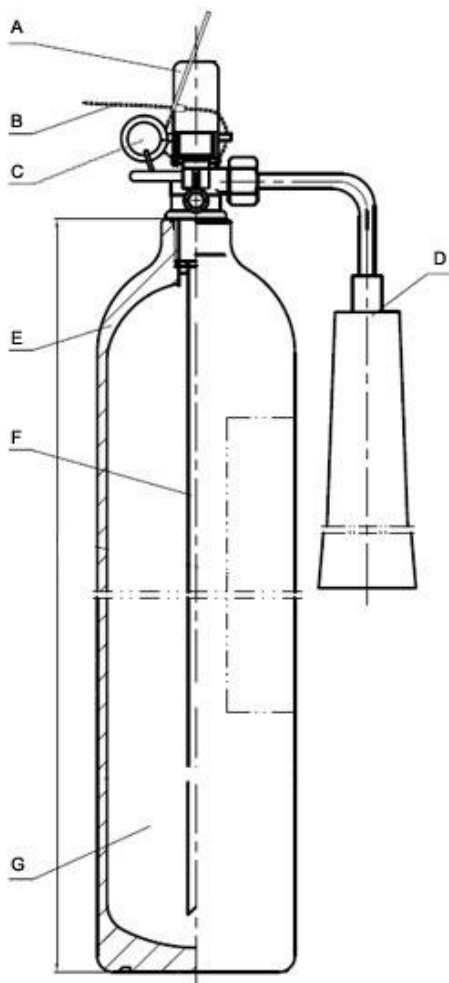

Ref	Description
A	Valve Assembly
B	Pull Tite Seal
C	Safety Pin
D	Hose and Horn Assembly
E	Cylinder
F	Discharge Tube
G	CO2
H	Wall bracket

FOAM Extinguisher



Type	AFFF Foam Spary	AFFF Foam Spary	AFFF Foam Spary
Capacity(Itr)	2	6	9
Fire Rating	8A 34B C	21A 144B C	21A 183B C
Cylinder Hight(mm)	310	470	525
Cylinder Out-Diameter(mm)	110	160	180
Cylinder Weight(kg)	1.4	3.3	4.8
Filled Weight(Itr)	2	6	9
Extinguisher Weight(kg)	4	10	14.7
Range of Throw(m)	> 2	> 4	> 4
Duration of Discharge(secs)	12	30	40
Working Pressure(bar, 20 °C)	15	15	15
Max Working Pressure(bar)	18	18	18
Test Pressure(bar)	27	27	27

Temperature Range(°C)	5°C-60°C	5°C-60°C	5°C-60°C
Min Wall-Thickness(mm)	1.08	1.24	1.3
Volume(L)	2.4	8	11.3
Material	St12/DC01	St12/DC01	St12/DC01
Packing Size(cm)	12x13x40	17x18x58	19x20x64
BS EN3 Approved	Yes	Yes	Yes


T.T. INTERNATIONAL CO., LTD.

Water Extinguisher



Type	Water Fire Extinguisher
Capacity(kg)	9
Fire Rating	13A
Cylinder Hight(mm)	525
Cylinder Out-Diameter(mm)	180
Cylinder Weight(kg)	5
Filled Weight(kg)	9
Extinguisher Weight(kg)	15
Range of Throw(m)	> 4
Duration of Discharge(secs)	50
Working Pressure(bar, 20 °C)	15
Max Working Pressure(bar)	18
Test Pressure(bar)	27

Temperature Range(°C)	-30°C-60°C
Min Wall-Thickness(mm)	1.3
Volume(L)	11.3
Material	St12/DC01
Packing Size(cm)	19x20x64
BS EN3 Approved	Yes

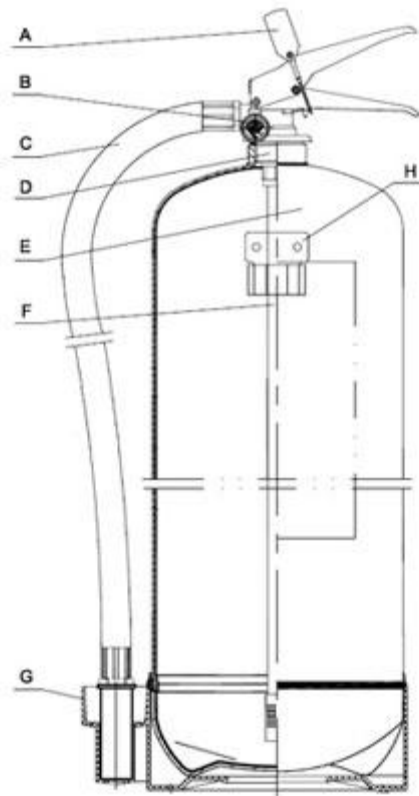

Ref	Description
A	Pull Tite Seal
B	Gauge
C	Hose Assembly
D	Valve Assembly
E	Cylinder
F	Discharge Tube
G	Skirt
H	Wall bracket

Our mainly products:

CO2 Extinguisher,

Dry Powder Extinguisher,

Foam Extinguisher,

Water Extinguisher,

Extinguisher Accessories, like Valve, Hose & Horn, Bracket, Siphon, Gauge, Base, Hoop, Wheel, Fixation Circler, Ring, and Hose Reel, etc...

We also supply OEM service, welcome!!!